



Seit 1872

Resistance  
grades CEN  
X und XI

# STACKE

S I C H E R H E I T M I T S Y S T E M

## Euroline strongroom doors

for strongrooms in modular  
and cast in situ design



**STACKE is a leading manufacturer offering project planning, production and performance of constructional measures for strongrooms in modular design and traditional strongrooms cast in situ.**

The room also comprises the strongroom or safe door tested and certified to the respective resistance grade. STACKE supplies strongroom doors of resistance grades II-XIII in accordance with EN 1143-1 and thus covers the total range of all resistance grades in a rather unique way.

This documentation provides information about strongroom doors of the resistance grades CEN X and XI. The table with the heading "Technical Data" is a short version of the performance description giving the major data.


The installation drawing - taking resistance grade X as an example - relates to the installation in walls cast in situ. Detailed drawings - by model and resistance grade - are available on request.

For room systems made of prefabricated elements in modular design, the door and the frame are integrated in the prefabricated wall.

STACKE safe doors in strongrooms can be used wherever valuables are to be securely stored and locked away. This includes applications in industry, trade, pharmaceutical companies, security transportation companies, authorities and private households. Thanks to the wide range of products, the demands of private persons and those of large and national banks can be satisfied equally well. Please feel free to contact us.

# Euroline strongroom doors

Resistance grades CEN X und XI

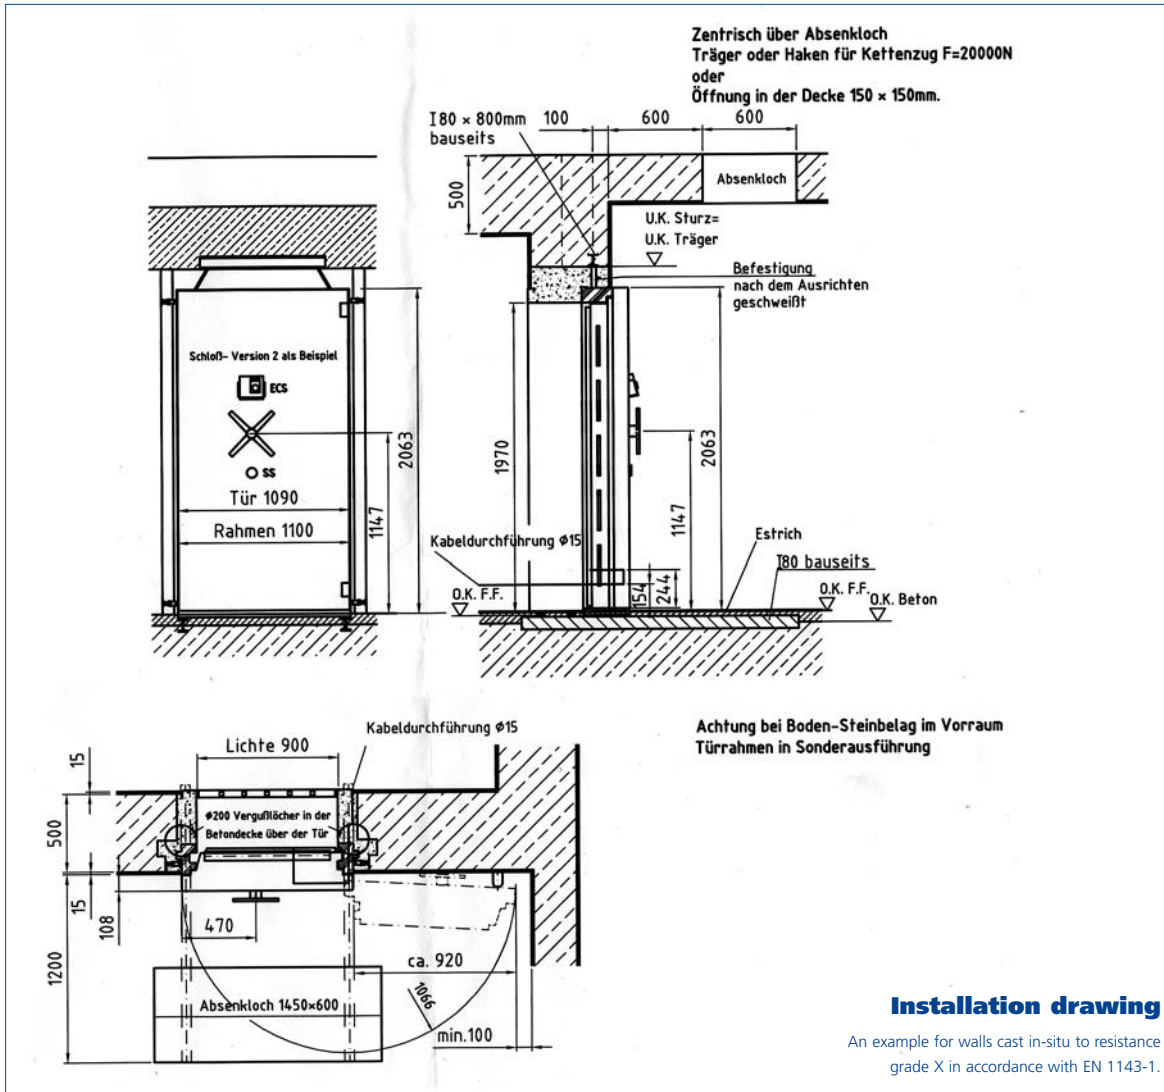

Technical data	EL T 250 X KB	EL T 350 XI KB
Resistance grade to EN 1143-1:	X (CD)	XI (CD)
Certificate:	VdS/ECB-S	VdS/ECB-S
Door opening dimensions:	1970 x 900 mm	1970 x 900 mm
Door thickness:	270 mm	370 mm
Compact thickness before the locking system:	150 mm	250 mm
Weight:	approx. 1600 kg	approx. 2160 kg
Door case for thicknesses of walls cast in situ:	530 mm	630 mm
Pivot point of door, optionally R or L:	x	x
Lock with 5 strike plates of stainless steel:	x	x
Hinge securing profile over total door height:	x	x
Lock weld with emergency locks:	7	10
Cable channel via bottom door hinge, invisible:	1	1
Service door with cylindrical lever lock and 2 turn fasteners:	x	x
Equipped for use with an IAS, without IAS components:	x	x
Lock: (Standard) Version 1/1.1	1/KL+1/CL Class 3	2/KL+1/CL Class 3
Lock: Version 3/3.1, mechanical/partly electrical, Class 3	1/KL+1/ECL Paxos o. TwinLock	2/KL+1/ECL Paxos o. TwinLock
Lock: Version 7/7.1, fully electrical, Class 3	2/ECL Paxos o. TwinLock	3/ECL Paxos o. TwinLock

KL=key lock, CL=mechanical code lock, ECL=electronic code lock

Stacke GmbH  
Jülicher Str. 390/392 · D-52070 Aachen  
Telephone 0049 (0)241 16808-0  
Telefax 0049 (0)241 16808-30  
info@stacke-safe.de · www.stacke-safe.de

# STACKE